




## DOT REFRIGERANT TANKS



- Typical recovery tanks have small diameter ports that restrict refrigerant flow and decrease recovery rates. RefTec 250 & 1000-lb D.O.T. tanks have been fitted with full 3/4" service valves and copper dip tubes to eliminate restrictions and allow faster refrigerant transfer.
- For R11, R12, R22, R113, R114, R123, R134a, and additional high-pressure refrigerants and blends. 30 & 50-lb tanks only service R410a.
- Quick connects are available for tanks servicing low-pressure refrigerants.
- Heating bands are available for distillation capabilities

Part number	Capacity / Port Size	Connections	80% Full Limit Switch
<b>CYL-1000</b>	1,000-lb capacity, 3/4" ports	3/4" Flare	
<b>CYL-1000-LS</b>	1,000-lb capacity, 3/4" ports	3/4" Flare	Yes
<b>CYL-1000-QC</b>	1,000-lb capacity, 3/4" ports	Quick Connects	
<b>CYL-1000-LS-QC</b>	1,000-lb capacity, 3/4" ports	Quick Connects	Yes
<b>CYL-250</b>	250-lb capacity, 3/4" ports	3/4" Flare	
<b>CYL-250-LS</b>	250-lb capacity, 3/4" ports	3/4" Flare	Yes
<b>CYL-250-QC</b>	250-lb capacity, 3/4" ports	Quick Connects	
<b>CYL-250-LS-QC</b>	250-lb capacity, 3/4" ports	Quick Connects	Yes
<b>CYL-050</b>	50-lb capacity, 1/4" ports	1/4" flare	
<b>CYL-050-LS</b>	50-lb capacity, 1/4" ports	1/4" flare	Yes
<b>CYL-030</b>	30-lb capacity, 1/4" ports	1/4" flare	
<b>CYL-030-LS</b>	30-lb capacity, 1/4" ports	1/4" flare	Yes

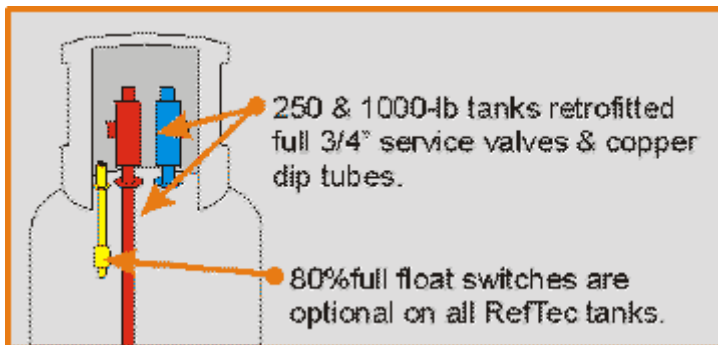

RefTec International, Inc.  
10530 Portal Crossing W, Suite 104  
Bradenton, FL 34211

Tel: 800-214-4883  
Sales fax: 941-750-0222  
[www.reftec.com](http://www.reftec.com)  
email: [sales@reftec.com](mailto:sales@reftec.com)